

**Aculus-HB-250** is developed from the combination of Chinese traditional acupuncture and Western "Laser Biostimulation" theory.


**Aculus-HB-250** is patented and made using the combination of modern laser diode technology, innovative optics design and computerized digital control.



**Aculus-HB-250** is specially designed for the laser treatment in aesthetic applications.

## Features

- Five lasers irradiate **simultaneously** with independent channel control to get accurate dosage, the controllable dosage can be treated to achieve the best therapy effectiveness.
- Microprocessor-based control, with the functions of self-diagnostic check and error detection, can automatically detect faulty alarm channel(s).
- User-friendly single function key to set the therapy process.
- Dynamic large size (80x50 mm) LCD with **blue backlit** display for clear reading.
- Musical auto time off on completion of therapy cycle.
- Patented laser modules directly tap to treatment points without the risk of laser leakage for complete protection.

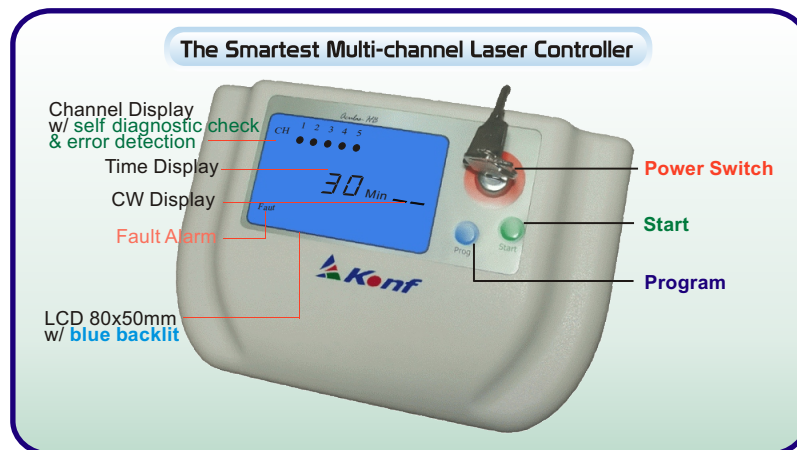


## Specifications

### Digital Controller

<b>Operation Environment</b>	0 ~ 40°C (32 ~ 105°F); 10 ~ 95%RH (Non-condensing)
<b>Storage Environment</b>	-20 ~ 85°C (4 ~ 185°F); 10 ~ 95%RH (Non-condensing)
<b>No. of Channels</b>	5
<b>Time Setting</b>	Automatic; 30 Minutes
<b>Frequency Setting</b>	Automatic; Continuous
<b>Music Alert</b>	Stop, and Fault
<b>Power Input Voltage</b>	90V AC ~ 264V AC
<b>Power Input Frequency</b>	47Hz ~ 63Hz
<b>Power Input Current</b>	Max. 1.0A (115V AC), 0.5A (230V AC)
<b>Power Supply Protection</b>	Short Circuit and Overload; Auto Recovery Mode
<b>CE Verification</b>	<b>EMC Directive 93/42/EEC</b>
	(Operation Environment: Medical Electrical Equipment)
	Standard Applied- IEC 60601-1 and EC 60601-1-2
<b>Dimensions</b>	205.7(L) x 256.5(W) x 101.6(H) mm; 8.1(L) x 10.1(W) x 4.0(H) in.
<b>Weight</b>	0.82 Kg (1.8 Lbs)

### Laser Module

<b>Laser Module Quantity</b>	5
<b>Laser Material</b>	Semiconductor Laser Diode
<b>Wavelength</b>	660 nm ~ 980 nm; Selectable
<b>Output Power</b>	100 ~ 400 mW; Selectable
<b>Standard Wavelength &amp; Output Power</b>	Selectable
	660nm / 50mW x 5
	780nm / 80mW x 5
<b>Cable Length</b>	980nm / 50mW x 5
	200 cm



### Aluminum Case

<b>Dimensions</b>	375(L) x 285(W) x 115(H) mm;
	14.8(L) x 11.2(W) x 4.6(H) in.
<b>Weight</b>	1.43 Kg (3.15 Lb)



\*The specifications of products are subject to change or modify without notice.